PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵:
A61F 7/12

(11) International Publication Number: WO 91/05528
(43) International Publication Date: 2 May 1991 (02.05.91)

(21) International Application Number: PCT/NL89/00078

(22) International Filing Date: 19 October 1989 (19.10.89)

(71) Applicant (for all designated States except US): GRANU-LAB B.V. [NL/NL]; Klepelhoek 11, NL-3833 GZ Leusden (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): VAN LIEBERGEN, Anthonius, Josephus [NL/NL]; Beemden 22, NL-3831 GM Leusden (NL).

(74) Agents: DE BRUIJN, Leendert, C. et al.; Nederlandsch Octrooibureau, Scheveningseweg 82, P.O. Box 29720, NL-2502 LS The Hague (NL). (81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent)*, DK, FI, FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), NO, SE (European patent), SU, US.


Published

With international search report. In English translation (filed in Dutch).

(54) Title: DEVICE FOR COOLING OR HEATING A PERSON

(57) Abstract

Device for cooling or heating a person with a circulation circuit for a cooling or heating fluid, wherein a closed elastically tube-like enclosure (1) is used. This can be introduced in a body cavity and a feed (2) and discharge (3) conduit open into the enclosure (1) for the cooling or heating fluid. The enclosure (1) is expandable by the fluid through pressure until it is in contact with the wall of the body cavity.

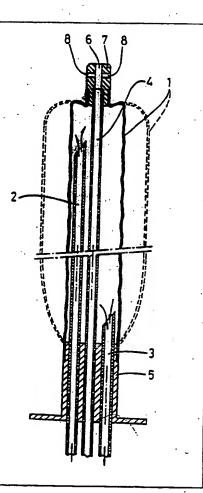

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT AU BB BE BF BG BJ BR CA CF CG CH CI DE	Austria Australia Barbados Belgium Burkina Faso Bulgaria Benin Brazil Canada Central African Republic Congo Switzerland Côtte d'Ivoire Cameroon Germany Denmark	ES FI FR GA GB GR HU IT JP KP KR LI LK LU MC	Spain Finland France Gabon United Kingdom Greece Hungary Italy Japan Democratic People's Republic of Korea Republic of Korea Liechtenstein Sri Lanka Luxembourg Monaco	MG ML MR MW NL NO PL RO SD SE SN SU TD TC US	Madagascar Mali Mauritania Malawi Netherlands Norway Poland Romania Sudan Sweden Senegal Soviet Union Chad Togo United States of America
---	---	--	--	--	--

WO 91/05528 PCT/NL89/00078

DEVICE FOR COOLING OR HEATING A PERSON

The invention relates to a device for cooling or heating of a person comprising a circulation circuit for a cooling or heating fluid.

5

10

15

20

25

30

35

Such a device is e.g. used for heating or cooling of a patient. A known device comprises a mattress, through which the cooling or heating fluid is circulated.

This known device has the drawback that a relatively long time is necessary to cool or heat the patient, because the mattress cools or heats the skin of the patient and the inner temperature of the patient only slowly decreases or increases.

The inventions aims to provide a device of this kind not having this drawback.

To this end the device according to the invention is characterized by a closed elastic enclosure, which can be introduced in a body cavity, such as the oesophagus, in which enclosure a feed and discharge conduit for cooling or heating fluid open and which can be expanded up to contact against the wall of the body cavity.

In the expanded position of the device it substantially contacts the wall of the body cavity such as oesophagus. So the cooling or heating fluid circulating in the enclosure can directly centrally heat or cool the related person. Because of this heating or cooling occurs much faster.

In a preferred embodiment of the device according to the invention the feed conduit or discharge conduit opens near the one extremity of the enclosure, whilst the discharge conduit, the feed conduit respectively opens near the other extremity of the enclosure. In this way it is guaranteed that circulating, cooling or heating fluid flows substantially through all over the enclosure, such that all over this enclosure an optimum cooling or heating effect is obtained.

Furthermore it is favourable if according to another prefered embodiment of the device according to the invention a further tube-like conduit extends through the enclosure and penetrates this at both extremities, said conduit opening near the front extremity 5

10

15

20

25

30

35 ·

of the enclosure outside of the enclosure. With this further tubelike conduit it is possible, if the device is introduced in the stomach of the person to be treated, to externally gain excess through the stomach, e.g. for suctioning of its contents or for realizing flushing of the stomach. The functioning of the enclosure is not affected by this further tube-like conduit, because it does not open into this enclosure but only extends therethrough.

To obviate attaching of the extremity of this further tubelike conduit by sunctioning according to a further embodiment of the device it is realized that on a short spacing, behind the opening in the conduit wall a number of radial directed ports are provided. Because of this an open connection between the internals of the tube-like conduit and its surrounding is provided.

To be able to check introduction of the device according to the invention in a body cavity it is preferred that this device is provided with equally lengthwise spaced markings such as silver points or the like being visible on X-ray images.

The invention is further elucidated referring to the drawing in which two embodiments of the device according to the invention are shown.

Fig. 1 shows a longitudinal section through a first embodiment of the device according to the invention, and

fig. 2 shows a partial longitudinal section on larger scale of a second embodiment of the device according to the invention.

The device shown in fig. 1 for cooling or heating of a person comprises a closed elastic tube-like enclosure 1, in which a feed conduit 2 and a discharge conduit 3 for a cooling or heating fluid open. The feed conduit 2 opens near the front extremity of the enclosure 1, whilst the discharge conduit 3 opens near the rear extremity of the enclosure.

Furthermore it is clear that through the enclosure 1 a further tube-like conduit 4 extends, opening near the front extremity of the enclosure outside of this enclosure 1. This conduit 4 does not communicate with the internals of enclosure 1. The rear extremity of the enclosure 1 opposite to the front extremity is connected to and closed by a mouth piece 5 which can be introduced in the mouth of the person to be treated and comprises rubber or the like.

WO 91/05528 PCT/NL89/00078

Feed conduit 2, discharge conduit 3 and conduit 4 extend through this mouthpiece 5. Mouth piece 5 is sealingly connected to enclosure 1 as well as to the said conduits 2-4. In that the enclosure 1 sealingly connects at its front extremity to the tube-like conduit 4 inside of this enclosure a delimited space is provided, being only accessible through feed conduit 2 and discharge conduit 3. The conduit 4 is provided at its opening 6 with a enlarged plastic tip 7. Within a short spacing behind opening 6 in the wall of this tip 7 a number of radial directed ports is provided, which communicate at one extremity with the surroundings and with the other extremity communicate with the internals of conduit 4.

10

15

20

25

30

35

If the device has to be introduced in a body cavity, such as the oesophagus, the enclosure is in a non-expanded position, e.g. as shown in the position in Fig. 1 indicated with solid lines. After the desired position of the device is obtained the cooling or heating fluid is introduced in the enclosure 1 through feed conduit 2 whilst the discharge conduit 3 is as yet closed. Because of this the enclosure 1 will expand and e.g. obtain the position shown in dashed lines. In this expanded position of the enclosure it has substantial contact with the wall of the body cavity. After this the discharge conduit 3 is opened such that the cooling or heating fluid circulates through enclosure 1. After terminating of the treatment the feed through feed conduit 2 can be stopped and the cooling or heating fluid can be completely discharged from the enclosure 1 through discharge conduit 3. Because of this enclosure 1 retracts and the device can be taken from the body cavity.

With conduit 4 it is possible to evacuate the stomach of a person to be treated during treatment. The functioning of the conduit 4 does not have any influence on the functioning of enclosure 1. The radial directed holes 8 prevent attachment of the opening 6 of the conduit to e.g. the wall of the stomach.

The connection of the enclosure to the tip 7 and to the mouth piece 5 is generally such that between the enclosure and the tip 7 and the mouthpiece 5 no sharp transitions occur.

The mouthpiece 5 functions specifically to prevent that the enclosure 1, normally comprising of latex material, is damaged, whilst it is prevented that the enclosure expands near the mouth.

. 10

15

20.

25

In the embodiment, shown in Fig. 1, conduits 2-4 are side by side. However, it is also possible more particular to embody feed conduit 2 and tube-like conduit 4 concentrically. This is shown in fig. 2. For maintaining the relative position of the feed conduit 2 and the conduit 4 it is possible that they have been embodied integrally, e.g. in that between the inner wall of the feed conduit 2 and the outer wall of conduit 4 spaced rib-like elements (not shown) have been provided.

To be able to check the insertion of the device in a body cavity it is possible that on uniform spacings in length direction marking points are provided, being visible on a X-ray immage. Such marking points can e.g. comprise silver.

The device described above comprises an oesophagus hypo-hyper thermal device, with which the center temperatures of patents can be effectively changed. Furthermore it is possible to improve healing of wound or an operation wound with this device. If the device is introduced in the oesophagus it can be useful in keeping this oesophagus opened.

The use of the device according to the invention obviates in several cases surgical treatment. Inserting of catheters and blood lines for controlling of the central temperature of a patient becomes superfluous.

The invention is not restricted to the embodiments described above which can be varried within the scope of the invention in several ways.

5

15

20

25


30

Claims

- 1. Device for cooling or heating of a person, having a circulating circuit for a cooling or heating fluid, characterized by a closed elastic tube-like enclosure, which can be positioned in a body cavity, such as oesophagus, in said enclosure a feed end discharge conduit for the cooling or heating fluid open and which can be expanded by this fluidum under pressure up to contact against the wall of the body cavity.
- 2. Device according to claim 1, characterized in that the enclosure is produced from latex.
 - 3. Device according to claim 1 or 2, characterized in that the feed conduit or discharge conduit opens near the one extremity of the enclosure, whilst the discharge conduit, feed conduit respectively opens near the other extremity of the enclosure.
 - 4. Device according to the claims 1-3, characterized in that, the rear extremity of the enclosure is connected to and is closed by a piece from rubber or the like which can be inserted in the mouth of the patient to be treated, the feed and discharge conduit extending through this mouthpiece.
 - 5. Device according to one of the claims 1-4, characterized in that a further tube-like conduit extends through the enclosure and penetrates at its both extremities, said conduit opening near the front extremity of the enclosure outside of this enclosure.
 - 6. Device according to claim 5, characterized in that the conduit near its opening is provided with an enlarged plastic tip.
 - 7. Device according to claim 5 or 6, characterized in that with a short spacing behind the opening of the conduit wall a number of radially directed ports is provided.
 - 8. Device according to one of the claims 5-7, characterized in that the tube-like conduit and the feed and discharge conduit respectively opening near the front extremity of the enclosure extend concentrically.
- 9. Device according to claim 8, characterized in that a tubelike conduit and the related feed and discharge conduit respectively are embodided integrally.
 - 10. Device according to one of the claims 1-9, characterized

in that it is provided with mark points being uniformly distributed over its length and being visible on X-ray images, such as silver points or the like.

5

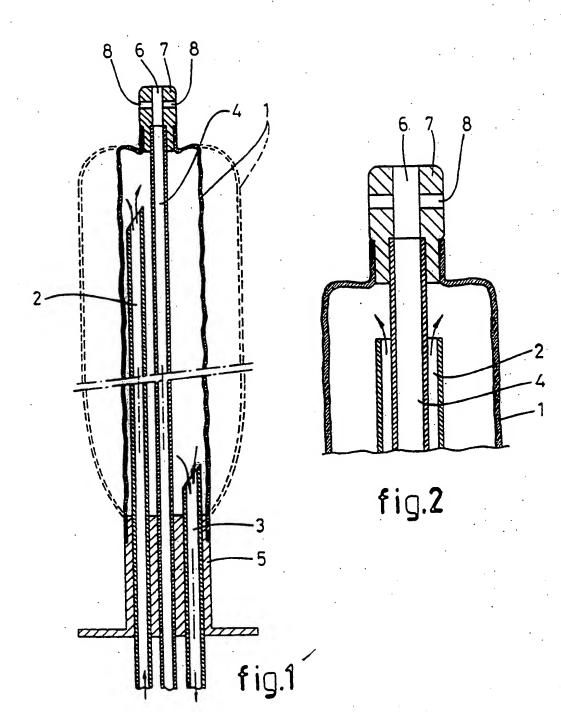

INTERNATIONAL SEARCH REPORT

International Application No PCT/NL 89/00078

I. CLASS	IFICATION OF SUBJECT MATTER (it several classifi	ication sympols apply, indicate all) *	
	to International Patent Classification (IPC) or to both Natio		
IPC ⁵ :	A 61 F 7/12		
II. FIELDS	SEARCHED		
	Minimum Documen	tation Searched 7	
Ciassificati:	en System	Classification Sympols	
IPC ⁵	. A 61 F		
	Documentation Searched other to to the Extent that such Documents	nan Minimum Documentation are Included in the Fields Searched ⁶	
٠.			
III. DOCL	MENTS CONSIDERED TO BE RELEVANT		
Category •	Citation of Document, 33 with Indication, where appr	opriate, of the relevant passages 12	I Relevant to Claim No. 13
x	GB, A, 658662 (REICH) 10 October 1951 see page 2, lines 25-	-49; figure 2	1-3
	·	-	
X	US, A, 3125096 (ANTILES) 17 March 1964 see column 2, line 8 line 9; figures 1,2	- column 3,	1,3,5,10
Y	8		6-9
		•	
х	US, A, 3848607 (ST. CLAIN 19 November 1974 see column 2, lines 3 3, line 46 - column column 4, line 56 - column 22; figures 1,4-6	26-32; column 4, line 26;	1,3,4
A			8,9
"A" do co. "E" ea: fib "L" do wh ct "O" do	al categories of cited documents: 19 current defining the general state of the ert which is not asidered to be of particular relevance firer document but published on or after the international and date current which may throw doubts on priority claim(s) or sich is cited to establish the publication date of another ation or other special reason (as epecified) current referring to an oral disclosure, use, exhibition or her means current published prior to the international filing date but ar than the priority date claimed	cited to understand the princ invention "X" document of particular releving cannot be considered noval involve an inventive step "Y" document of particular relevicannot be considered to involve adocument is combined with document is combined with a	ance: the claimed invention or cannot be considered to cannot be considered to can invention or or invention or cannot be considered to cannot on the claimed invention we an inventive step when the may or more other such document obvious to a person skilled
	TIFICATION	nametry man is	·
	he Actual Completion of the International Search June 1990	Date of Mailing of this international 2 9. 06, 90	Search Report
	onal Searching Authority	Signature of Authorized Officer	
	EUROPEAN PATENT OFFICE	H Doniets ->	H. DANIELS

	MENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEE	Relevant to Claim No.
etagory *	Citation of Document, " with indication, where appropriate, of the relevant passages	2.
Y	US, E, 30365 (MATTLER) 12 August 1980 see column 3, line 55 - column 4, line 14; figure 9	6,7
x	US, A, 3496942 (SHIPLEY) 24 February 1970 see column 3, lines 27-57; figures 1,3	1,3
A		4
	Α	
		-
	*	·
		·
	·	

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

NL 8900078

-SA 31792

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 26/06/90
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A~ 658662		None	,
US-A- 3125096		None	
US-A- 3848607	19-11-74	CA-A- 1024029 DE-A- 2251135 FR-A- 2158002 GB-A- 1336270	10-01-78 03-05-73 08-06-73 07-11-73
US-E- 30365	12-08-80	US-A- 3896816	29-07-75
US-A- 3496942	24-02-70	None	

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS

IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

FADED TEXT OR DRAWING

BLURRED OR ILLEGIBLE TEXT OR DRAWING

SKEWED/SLANTED IMAGES

COLOR OR BLACK AND WHITE PHOTOGRAPHS

GRAY SCALE DOCUMENTS

LINES OR MARKS ON ORIGINAL DOCUMENT

REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

IMAGES ARE BEST AVAILABLE COPY.

☐ OTHER:

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.